



KBUS

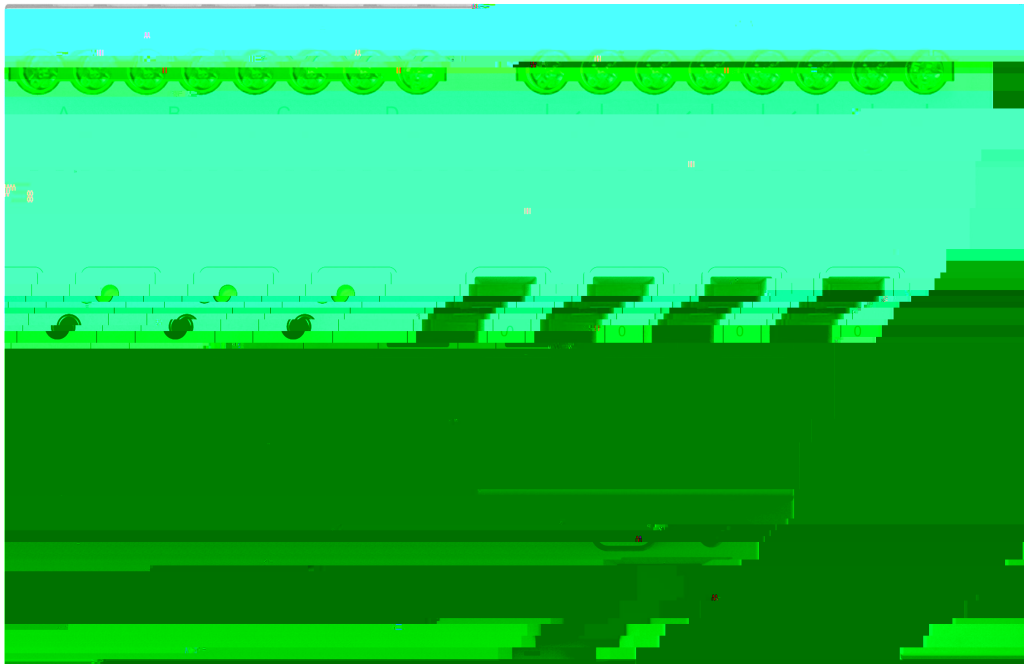

注意事项

- 1、请远离强磁场、高温、潮湿等环境。

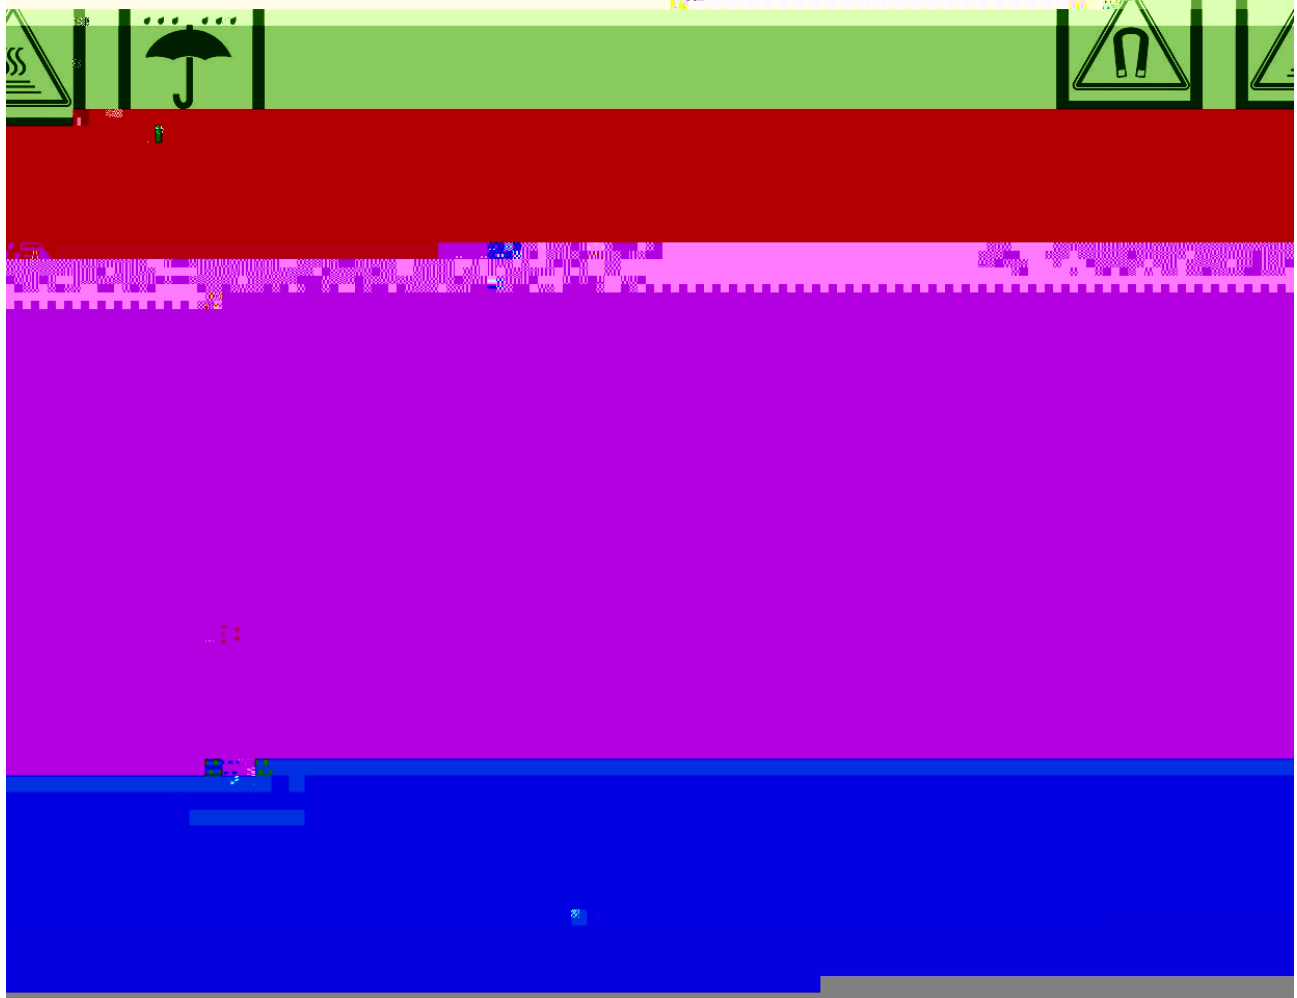



k

! !

k

k

! ! ! k

k

k

k

k



!



k

k

k

k



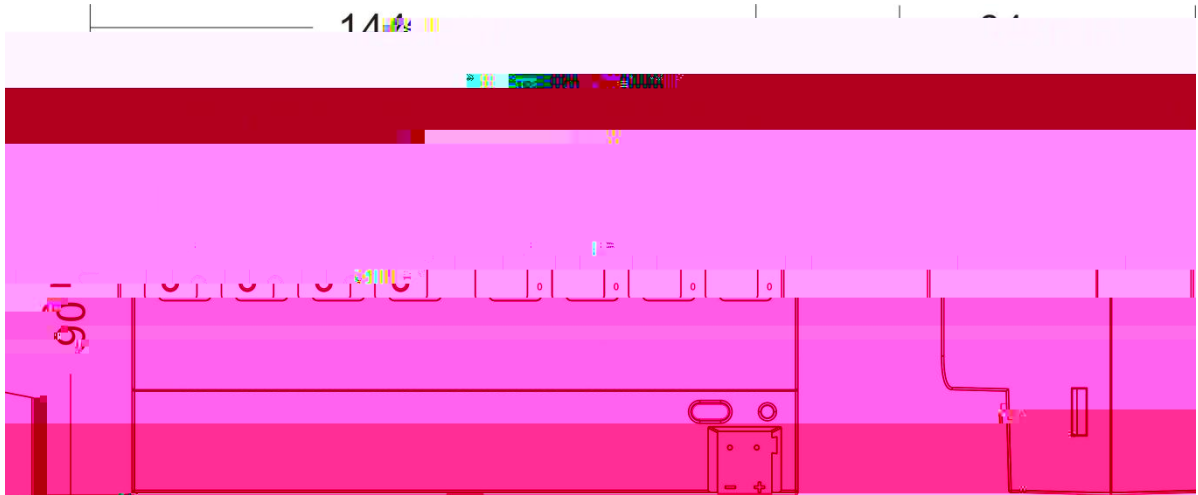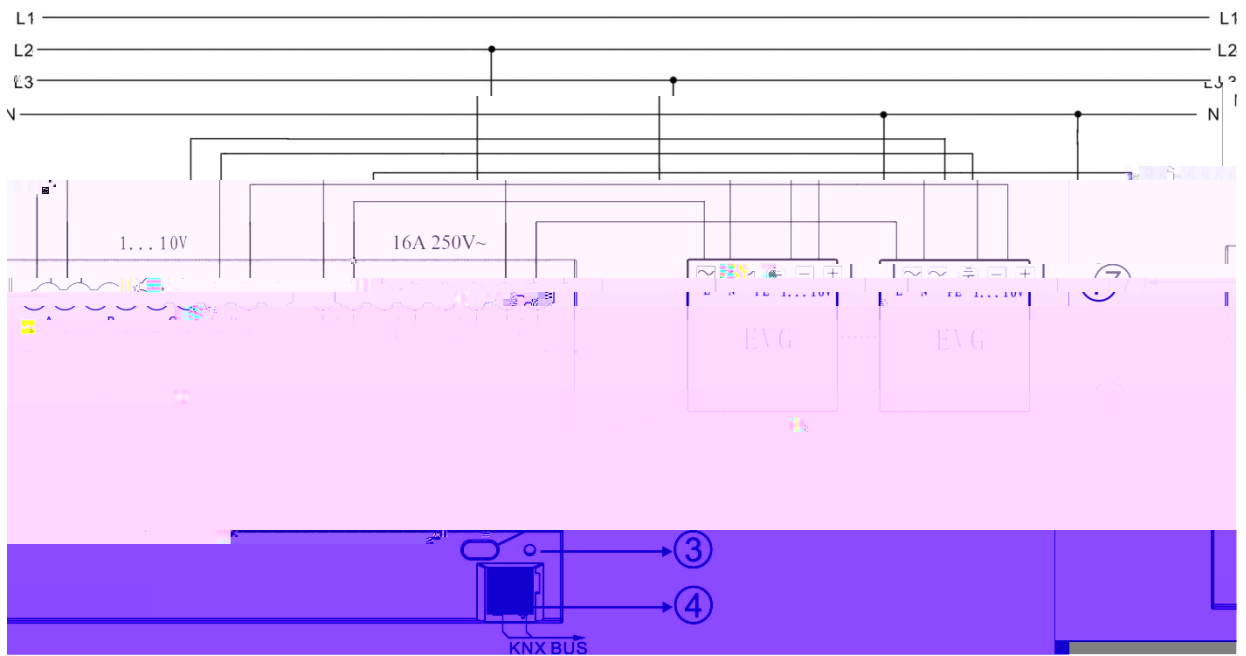

F

F



h

4

3

3

W !



k

φ

k

k

k

k

k

k

k



φ

!

φ

k

□□□

% of NOx'P



φ k

k

k

k

k

k

k

k

k

!

!



k

k

KNX

k


k

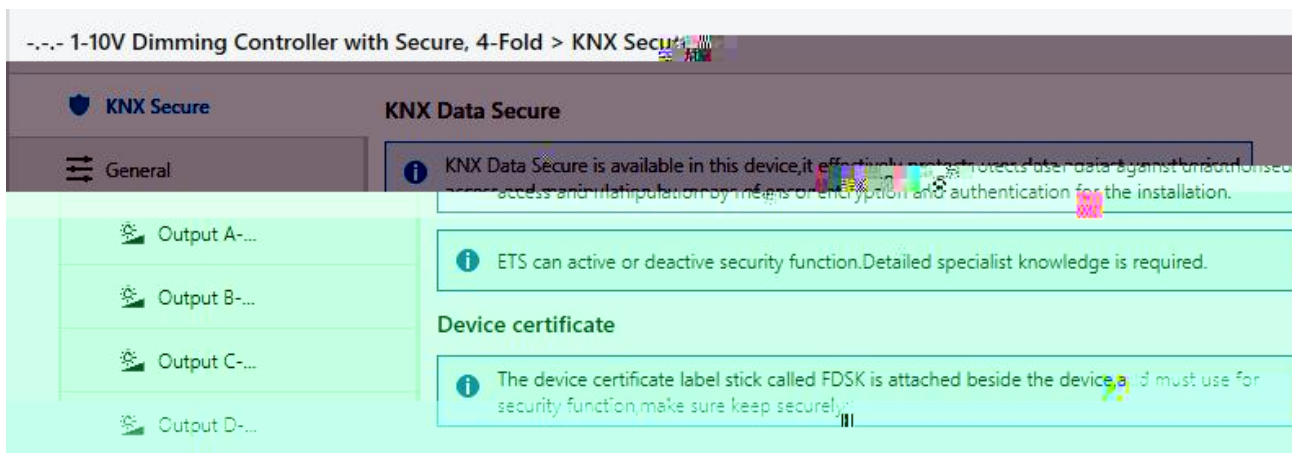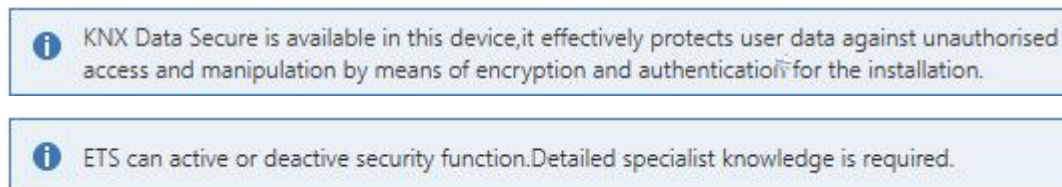

k


k

k



k



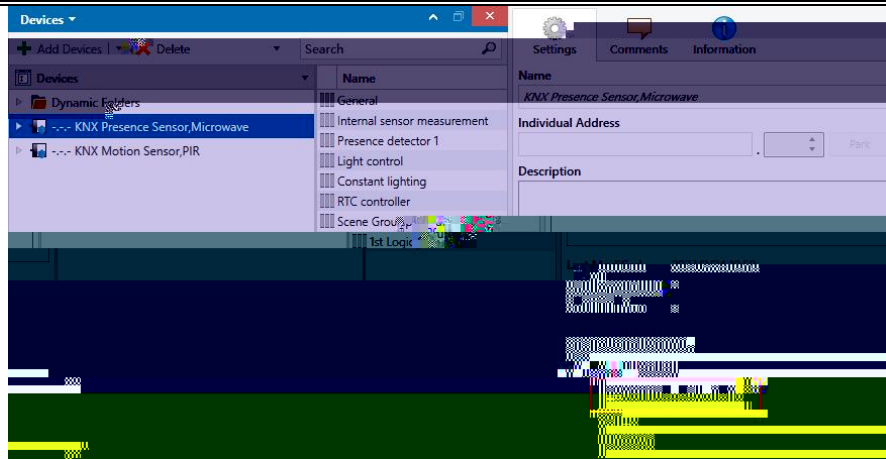

k

k

k

k



k



Test Secure demo Import Date: 2022/4/27 16:49 Last Mo

Details

Security

Project

Project Files

Export

Export Keyring


Device Certificates

+ Add - Delete

Device

Factory Key (FDSK)

378DE0F982C68	0085:25090001	F25370641BEC1AAFF
	0085:25090002	653



k

k


“Output X”


k

k

k


k

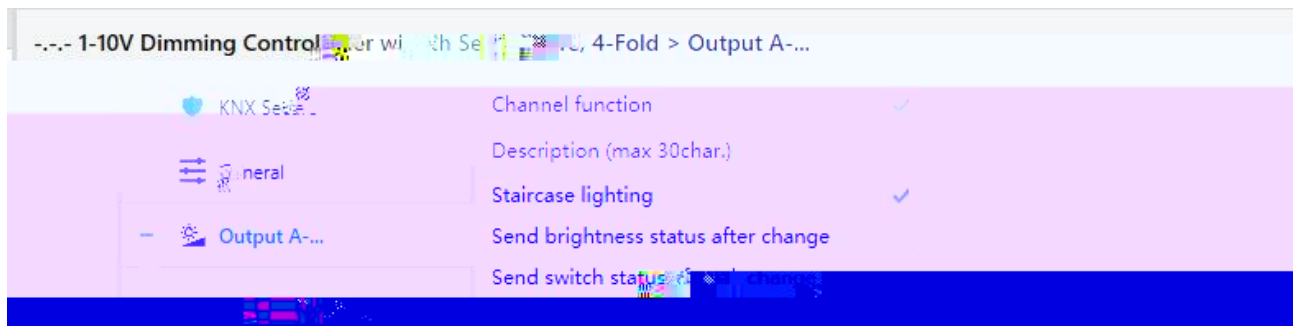








k

k




k

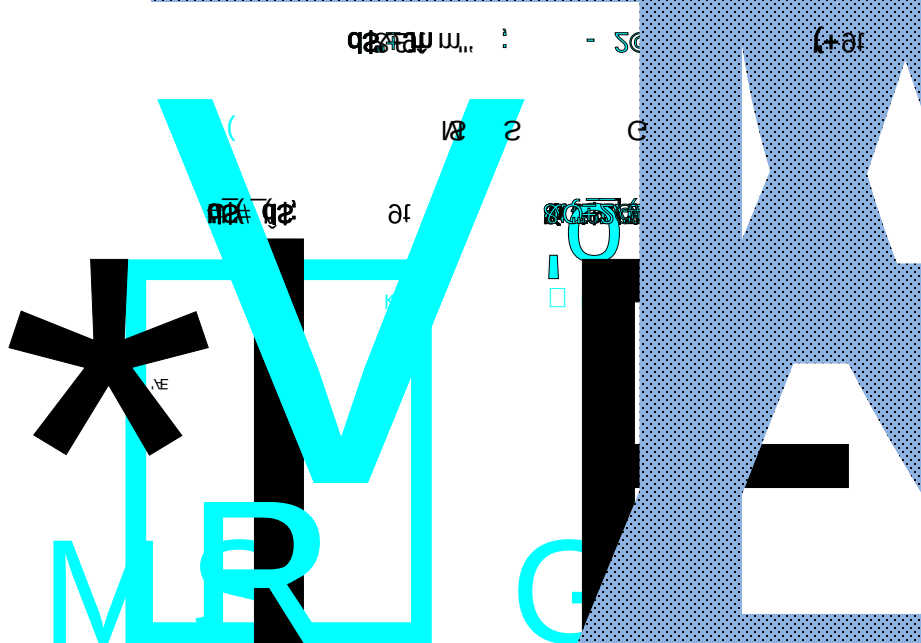


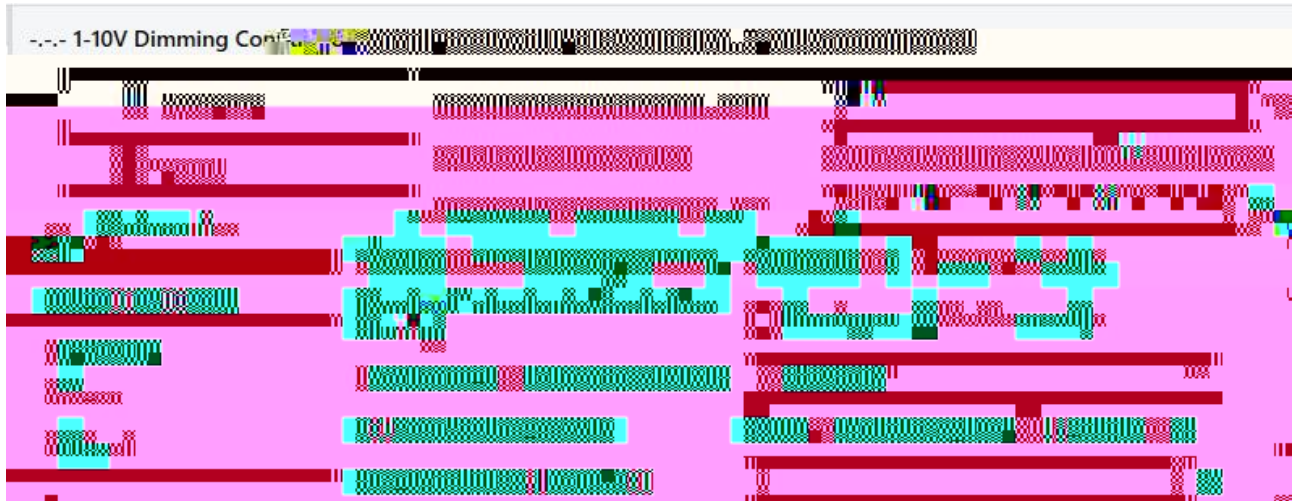




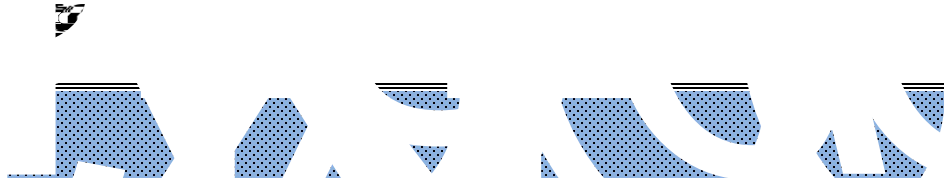


□ □ k



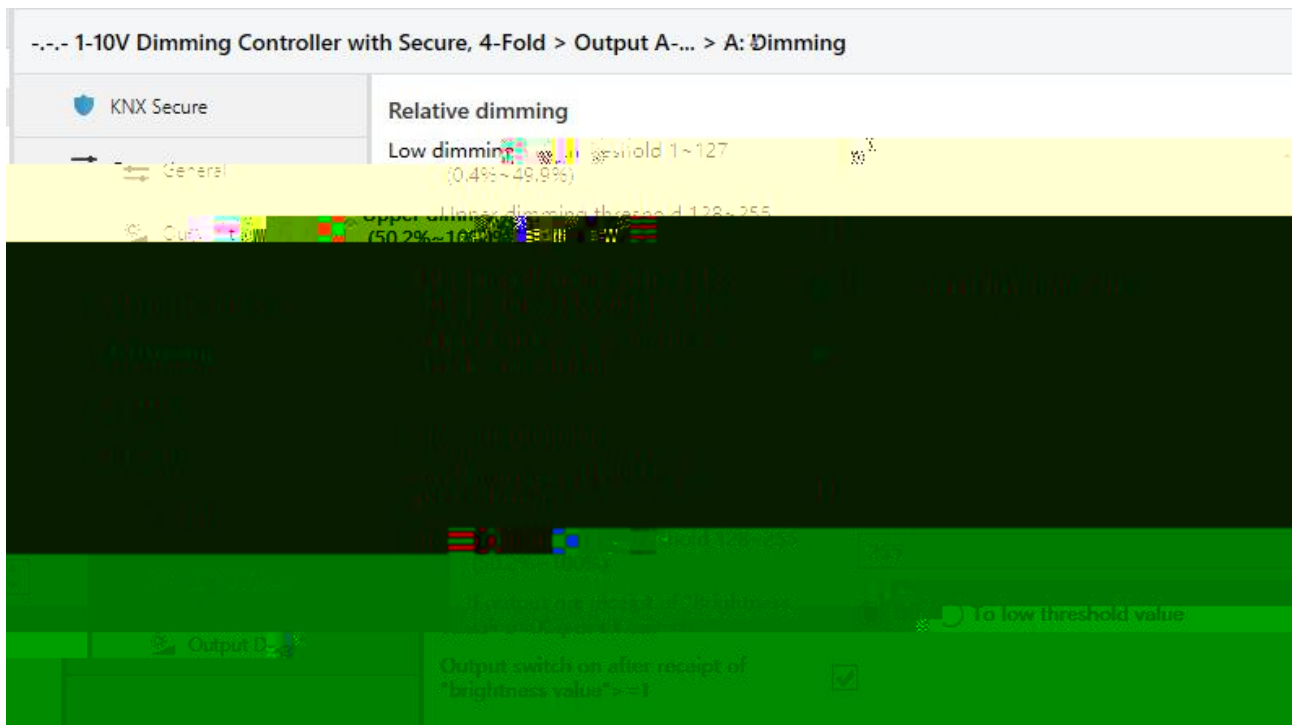

k


k



φ

k


k



φ

k


k



k


k

k




k

k



k



k

k

k

k




k

k

k

k

k






k

k


k

k



k



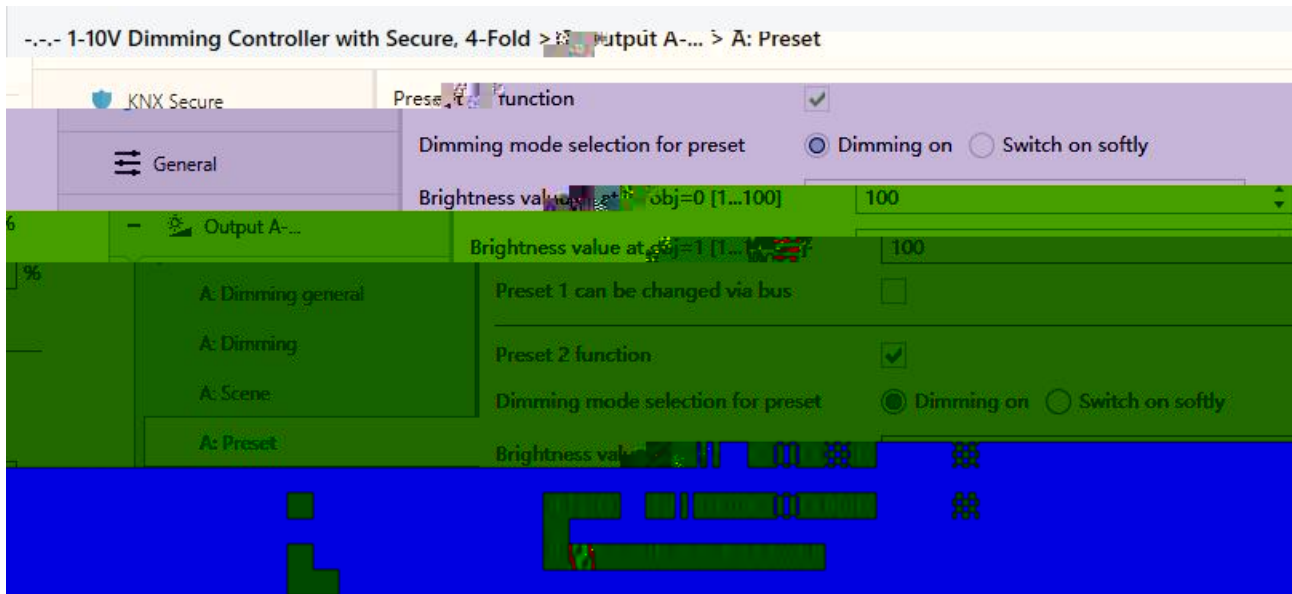

k

k

k




k

k

k



k



k

k

k

k

k

1-10V Dimming Controller with Secure, 4-Fold > Output A-... > A: Staircase lighting

KNX Secure

General

Duration of staircase lighting : Base

Duration of staircase lighting : Factor

Time for dimming process to 40% (40%)

Dimming process value for staircase lighting

Staircase lighting after bus recovery

Staircase value at permanent-on

Switch off after output becomes 0

1.0s

#

[0...100]

[0...100]

Switch off

Switch on

[20...100]



100

k

k

k


k




k

k

k



k




k

k



k

k



“Dimming Actuator”

Number	Name	Object Function	Description	Group Address	Length	C	R	W	T	U	Data Type	Priority
1	Output A...	Switch			1 bit	C	-	W	-	-	switch	Low
2	Output A...	Switch, status			1 bit	C	R	-	T	-	switch	Low
3	Output A...	Relative dimming			4 bit	C	-	W	-	-	dimming control	Low



k





k					
k					

“Dimming Actuator”

Number	Name	Object Function	Description	Group Address	Length	W	T	U	Data Type	Priority
1	Dimmer	Dimmer	Dimmer	1000	4	0	0	0	0	0

k					
				k	k
k					