



H

H-OS05

_V1.1



nr



		1
1.1		1
1.2		1
		2
2.1		2
2.2		3
		4
3.1		4
3.2		55h.5h h
3.3		

H
IC

1.1

- IC
-
-
-
- /
-

1.2

1

DC 24V

≤ 60mA

≤ 130mA

-20 55

-40 70

(W/H/D) 120 × 194 × 44.7mm

2

CMOS

30W


95 °

0 lux

2.2mm

12 °

2.1

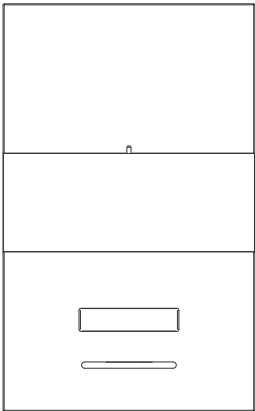

2.2




RJ45					24V	PoE
NO	COM	NC	/			
GS	GS-GND					
GND	DC+					

3.1

	W/H/D : 100.6 × 175.5 × 39mm
	
	



3.2

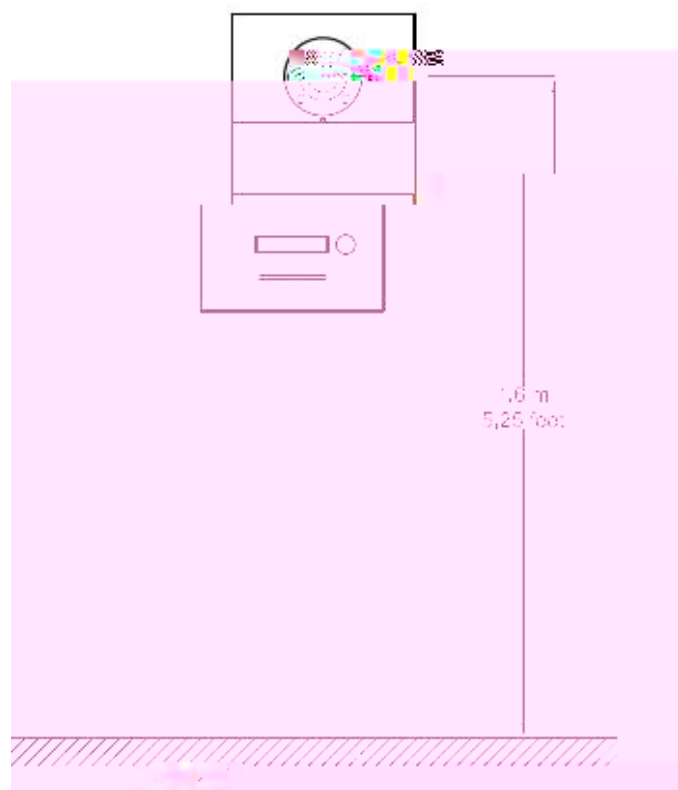


1.6

3.3

-

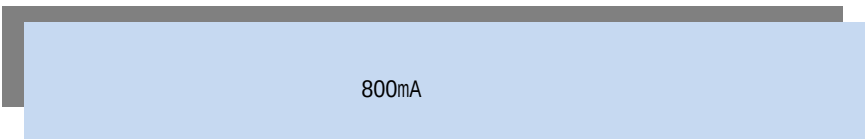

●

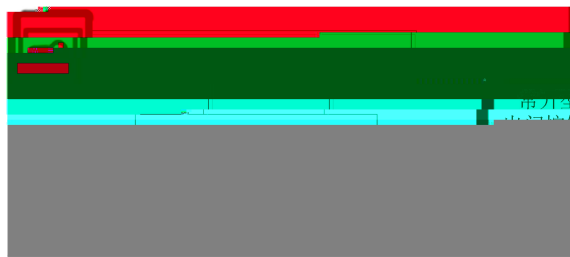

●



4.1

30

4.2

1)

2)

3)

4.3

5S

GVS

1

30

4.4

10000

IC
PC

PC

1

 PC

4.5

120



4.6

