

注意事项


1. 请远离强磁场、高温、潮湿等环境。



2. 不要将设备放置在地板上或接受强烈日光直射。



3. 不要使用湿布或具有挥发性的清洁剂擦拭设备。



1.1		1
1.2		1
2.1		2
2.2		3
2.3		4
3.1		5
3.2		6
4.1		7
4.2		7
4.2.1		7
4.2.2		8
4.3		8
4.3.1		8
4.3.2		9
4.3.3		9
4.3.4		9
5.1		10
5.2		11
5.3		

6.4		14
6.5		16
6.6		16
7.1		17
7.2		18
7.3		18
7.4		19
7.5		19
7.6		20

M

TCP/IP

DC 24V

300mA

200mA

-10

+55

95%

CMOS

123°

200W

3.5mm


0 lux


LCD


600×1024

7”

(W/H/D) 148.5×

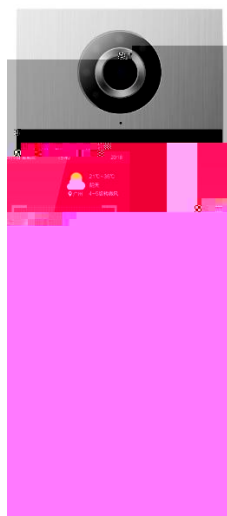

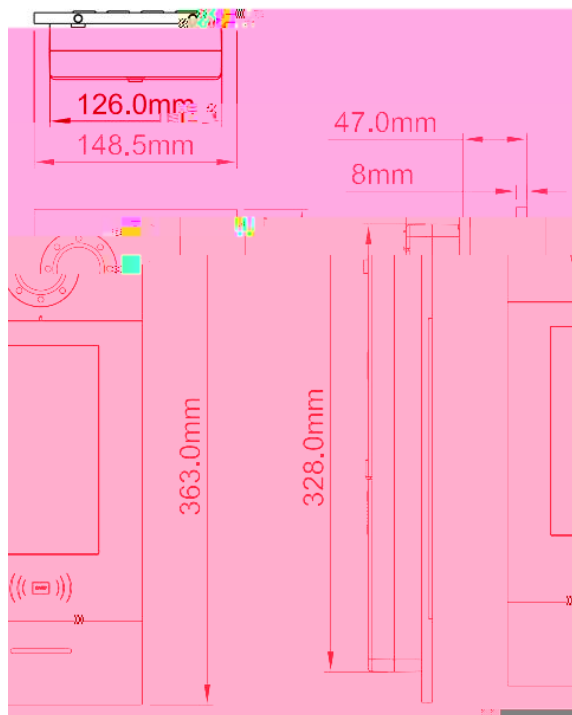

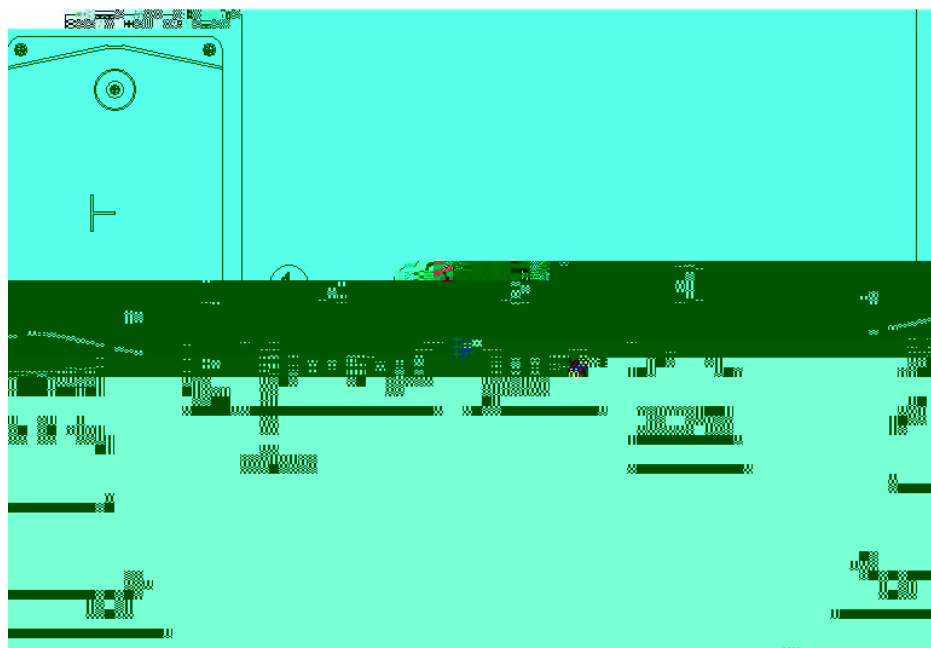

DC 24V

DC 18-30V



+12V

>18V

2



W/H/D

1

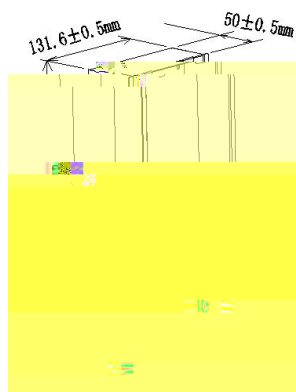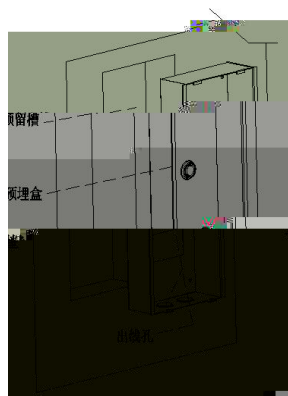


3

4

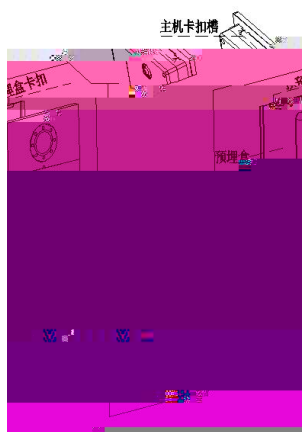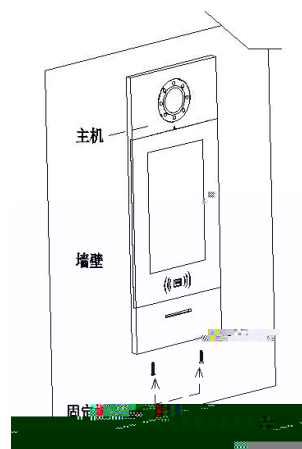

5


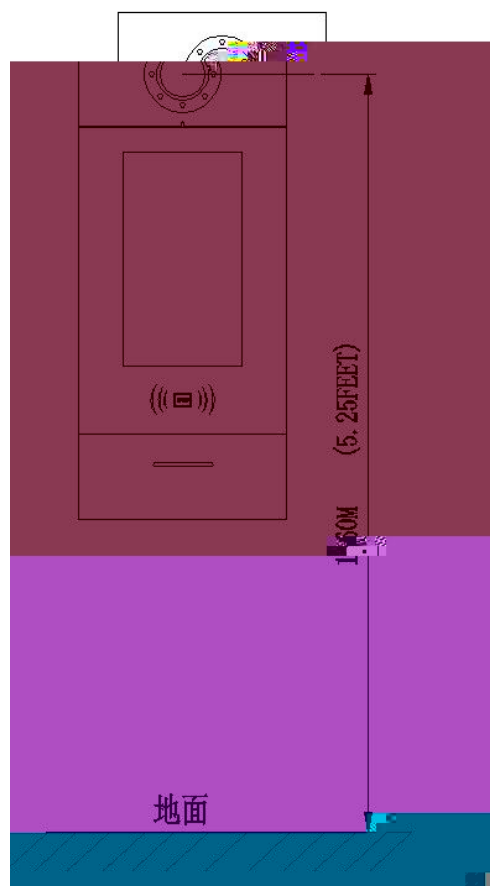


1.6




1



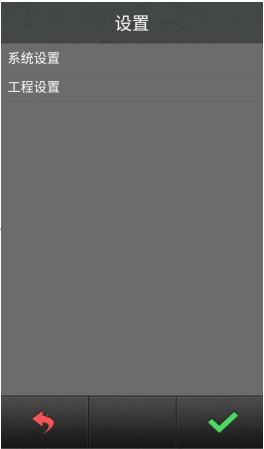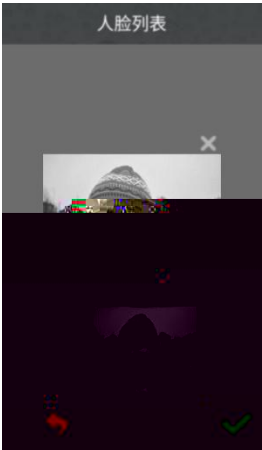

1

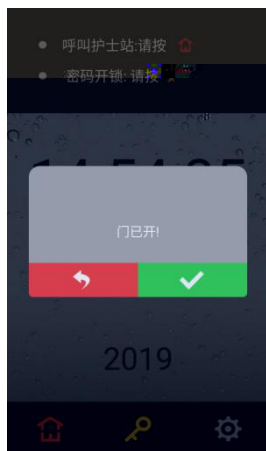

2

3




1

2





3 5678

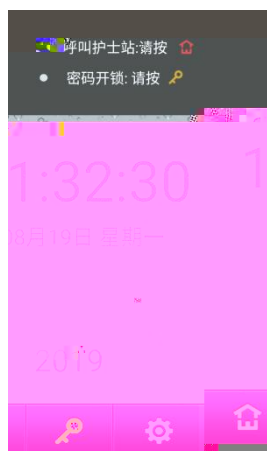



请输入工程密码

密码:

1	2	3
4	5	6
7	8	9
✕	0	✓
↶		🗑

“2718”





设置


系统设置

工程设置

↶		✓
---	--	---

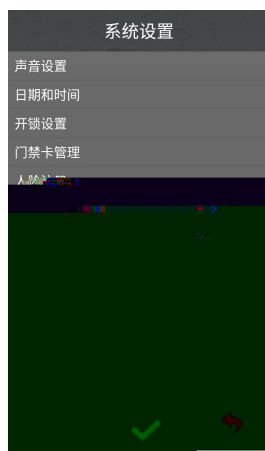

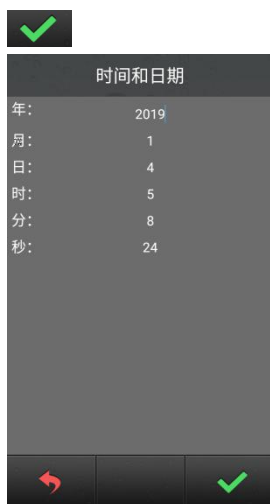





“

”



“


”



“ ”



“ ”

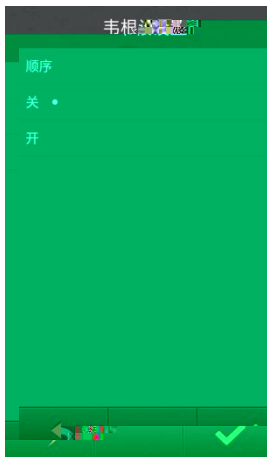




“.”

ip



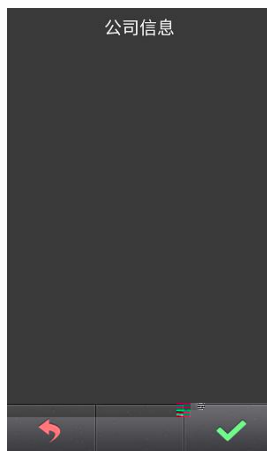

IP

MAC

